



Air-Cooled Liquid Chillers with Integrated Hydronic Module

AQUASNAP™
with PURON® refrigerant



Carrier is participating in
the Eurovent Certification
Programme. Products are
as listed in the Eurovent
Directory of Certified
Products.

Puron
the environmentally sound refrigerant

Model shown is with Euro Pack
option

30RB 262-802

Nominal cooling capacity 260-760 kW

The new generation of Aquasnap Puron liquid chillers features the latest technological innovations: ecological refrigerant R410A, scroll compressors, low-noise fans made of a composite material, auto-adaptive microprocessor control. The Aquasnap can be equipped with an integrated hydronic module, limiting the installation to straightforward operations like connection of the power supply and the chilled water supply and return piping.

Features

Quiet operation

- Compressors
 - Low-noise scroll compressors with low vibration level
 - The compressor assembly is installed on an independent chassis and supported by flexible anti-vibration mountings
 - Dynamic suction and discharge piping support, minimising vibration transmission (Carrier patent)
 - Acoustic compressor enclosure, reducing radiated noise emissions (Euro Pack option)
- Condenser section
 - Condenser coils in V-shape with an open angle, allowing quieter air flow across the coil
 - Low-noise 4th generation Flying Bird fans, made of a composite material (Carrier patent) are now even quieter and do not generate intrusive low-frequency noise
 - Rigid fan installation preventing start-up noise (Carrier patent)

Easy and fast installation

- Integrated hydronic module (option)
 - Centrifugal low or high-pressure water pump (as required), based on the pressure loss of the hydronic installation
 - Single or dual pump (as required) with operating time balancing and automatic changeover to the back-up pump if a fault develops
 - Water filter protecting the water pump against circulating debris
 - High-capacity membrane expansion tank ensures pressurisation of the water circuit
 - Thermal insulation and frost protection down to -20°C, using an electric resistance heater
 - Pressure gauge to check filter pollution and measure the system water flow rate
 - Water flow control valve (18 control turns)
- Simplified electrical connections
 - A single power supply point without neutral (30RB 262-522)
 - Main disconnect switch with high trip capacity (Euro Pack option)
 - 24 V control circuit without risk from a transformer included
- Fast commissioning
 - Systematic factory operation test before shipment
 - Quick-test function for step-by-step verification of the instruments, electrical components and motors

Economical operation

- Increased energy efficiency at part load
 - The refrigerant circuit includes two to four compressors connected in parallel. At part load, around 99% of the operating time, only the compressors that are absolutely necessary operate. At these conditions the compressors operating are even more energy efficient, as they use the total condenser and evaporator capacity.
 - The electronic expansion device (EXV) allows operation at a lower condensing pressure (EER optimisation).
 - Dynamic superheat management for better utilisation of the evaporator heat exchange surface.
- Heat reclaim (option)
 - Free hot water production by the water condenser (recovery of 100% of the rejected heat)
- Reduced maintenance costs
 - Maintenance-free scroll compressors
 - Fast diagnosis of possible incidents and their history via the Pro-Dialog Plus control
 - R410A refrigerant is easier to use than other refrigerant blends

Environmental care

- Ecological R410A refrigerant
 - Chlorine-free refrigerant of the HFC group with zero ozone depletion potential
 - High-density refrigerant, therefore less refrigerant required
 - Very efficient - gives an increased energy efficiency ratio (EER)
- Leak-tight refrigerant circuit
 - Braze refrigerant connections for increased leak-tightness
 - Reduction of leaks as no capillary tubes and flare connections are used
 - Verification of pressure transducers and temperature sensors without transferring refrigerant charge
 - Discharge shut-off valve allows storage of the refrigerant charge in the condenser for simplified maintenance.

Superior reliability

- State-of-the-art concept
 - Cooperation with specialist laboratories and use of limit simulation tools (finite element calculations) for the design of the critical components, e.g. motor supports, suction/discharge piping
 - Compressor control box installed on the cold side of the compressor (Carrier patent)

Auto-adaptive control

- Control algorithm prevents excessive compressor cycling and permits reduction of the water quantity in the hydronic circuit (Carrier patent)
- Automatic compressor unloading in case of abnormally high condensing pressure. If an anomaly occurs (e.g. fouled condenser coil, fan failure) Aquasnap continues to operate, but at reduced capacity.

Exceptional endurance tests

- Corrosion resistance tests in salt mist in the laboratory
- Accelerated aging test on components that are submitted to continuous operation: compressor piping, fan supports
- Transport simulation test in the laboratory on a vibrating table. The test is based on a military standard and equivalent to 4000 km by truck.

Pro-Dialog Plus control

Pro-Dialog Plus combines intelligence with operating simplicity. The control constantly monitors all machine parameters and precisely manages the operation of compressors, expansion devices, fans and of the evaporator water pump for optimum energy efficiency.

Energy management

- Internal time schedule clock: permits chiller on/off control and operation at a second set-point
- Set-point reset based on the outside air temperature or the return water temperature
- Master/slave control of two chillers operating in parallel with operating time equalisation and automatic change-over in case of a unit fault
- Start/stop control based on the air temperature.

Ease-of-use

- User interface with synoptic diagram for intuitive display of the principal operating parameters: number of compressors operating, suction/discharge pressure, compressor operating hours, set-point, air temperature, entering/leaving water temperature
- Ten menus for direct access to all machine commands, including fault history, allowing fast and complete chiller diagnostics



Pro-Dialog Plus operator interface

Remote management (standard)

A simple two-wire communication bus between the RS485 port of the Aquasnaps and the Carrier Comfort Network offers multiple remote control, monitoring and diagnostic possibilities. Carrier offers a vast choice of control products, specially designed to control, manage and supervise the operation of an air conditioning system. Please consult your Carrier representative for more information on these products.

- Start/stop: opening of this contact will shut down the unit
- Dual set-point: closing of this contact activates a second set-point (example: unoccupied mode)
- Demand limit: closing of this contact limits the maximum chiller capacity to a predefined value
- User safety: this contact is connected in series with the water flow switch and can be used for any customer safety loop
- Heat reclaim (option): closing of this contact allows heat reclaim mode operation
- Water pump 1 and 2 control*: these outputs control the contactors of one or two evaporator water pumps
- Water pump on reversal*: these contacts are used to detect a water pump operation fault and automatically change over to the other pump
- Operation indication: this volt-free contact indicates that the chiller is operating (cooling load) or that it is ready to operate (no cooling load)
- Alert indication: this volt-free contact indicates the presence of a minor fault
- Alarm indication: this volt-free contact indicates the presence of a major fault that has led to the shut-down of one or two refrigerant circuits

* contacts already supplied with the hydronic module option

Remote management (EMM option)

- Room temperature: permits set-point reset based on the building indoor air temperature (with Carrier thermostat)
- Set point reset: ensures reset of the cooling set-point based on a 4-20 mA or 0-5 V signal
- Demand limit: permits limitation of the maximum chiller demand based on a 4-20 mA or 0-5 V signal
- Demand limit 1 and 2: closing of these contacts limits the maximum chiller capacity to three predefined values
- User safety: this contact can be used for any customer safety loop, closing of the contact generates a specific alarm
- Ice storage end: when ice storage has finished, this input permits return to the second set-point (unoccupied mode)
- Time schedule override: closing of this contact cancels the time schedule effects
- Out of service: this signal indicates that the chiller is completely out of service
- Chiller capacity: this analogue output (0-10 V) gives an immediate indication of the chiller capacity
- Compressor operation: this contact signals that one or several compressors are in operation.



Options and accessories

Options	Description	Advantages	Use
Euro Pack	This option contains the options enclosure panels, evaporator frost protection, main disconnect switch and low noise level	Aesthetics, ease-of-installation and low operating noise	30RB 262-802
Condenser with pretreated fins	Fins made of pre-treated aluminium (polyurethane and epoxy)	Improved corrosion resistance, recommended for marine environments	30RB 262-802
Condenser with anti-corrosion post-treatment	Factory application of Blygold Polual treatment on the coils	Improved corrosion resistance, recommended for urban, industrial and rural environments	30RB 262-802
Suction valve	Shut-off valves on the compressor suction piping	Simplified maintenance	30RB 262-802
Enclosure panels	Side panels on each end of the coils	Improved aesthetics	30RB 262-802
Grilles	Metallic grilles on all four unit faces (requires the enclosure panel option)	Improved aesthetics	30RB 262-802
Evaporator with aluminium jacket	Evaporator thermal insulation protection by aluminium sheets	Improved resistance to climatic aggression	30RB 262-522
Evaporator and hydronic module with aluminium jacket	Evaporator and water piping thermal insulation protection by aluminium sheets	Improved resistance to climatic aggression	30RB 262-522
Low-pressure single-pump hydronic module	See hydronic module chapter	Easy and fast installation	30RB 262-522
Low-pressure dual-pump hydronic module	See hydronic module chapter	Easy and fast installation, operating safety	30RB 262-522
High-pressure single-pump hydronic module	See hydronic module chapter	Easy and fast installation	30RB 262-522
High-pressure dual-pump hydronic module	See hydronic module chapter	Easy and fast installation, operating safety	30RB 262-522
Evaporator frost protection	Resistance heater on the evaporator	Evaporator frost protection at low outside temperatures	30RB 262-802
Winter operation	Fan speed control via frequency converter	Stable unit operation when the air temperature is between 0°C and -20°C	30RB 262-802
Low noise level	Acoustic compressor enclosure	Noise emission reduction	30RB 262-802
Very low noise level	Acoustic compressor enclosure and low-speed fans	Noise emission reduction	30RB 262-802
Twining	Unit equipped with an additional field-installed leaving water temperature sensor, allowing master/slave operation of two chillers connected in parallel	Optimised operation of two chillers connected in parallel with operating time equalisation	30RB 262-802
Heat reclaim condenser	Water condenser, allowing recovery of 100% of the rejected heat	Free hot water production simultaneously with chilled water production	30RB 262-522
Main disconnect switch without fuse	Factory-installed main electric disconnect switch in the control box	Ease-of-installation and compliance with local electrical regulations	30RB 262-802
Main disconnect switch with fuse	Factory-installed main electric disconnect switch with fuse in the control box	Same advantage as main disconnect switch and reinforced anti-short circuit protection	30RB 262-802
JBus gateway	Two-directional communications board, complies with JBus protocol	Easy connection by communication bus to a building management system	30RB 262-802
LonTalk gateway	Two-directional communications board, complies with LonTalk protocol	Easy connection by communication bus to a building management system	30RB 262-802
Energy Management module EMM	See controls manual	Easy connection by wired connection to a building management system	30RB 262-802
<hr/>			
Accessories	Description	Advantages	
Connection sleeve	Piping to be welded with Victaulic connection	Ease-of-installation	30RB 262-802
Energy Management Module EMM	See controls manual	Easy connection by wired connection to a building management system	30RB 262-802
Scrolling Marquee Interface	Remotely installed user interface (communication bus)	Remote chiller control up to 300 m	30RB 262-802
Power cable connection side extension	Side extension on the power control box for a reduced cable bend radius	Use of power cables with stronger section	30RB 262-802

Sound levels


30RB	262	302	342	372	402	432	462	522	602	672	732	802
Unit with Euro Pack												
Sound power level dB(A) 10 ⁻¹² W*	90	90	90	91	91	92	92	93	93	94	94	94
Sound pressure level dB(A) at 10 m**	57	58	58	59	59	60	60	60	61	61	61	62
Standard unit												
Sound power level dB(A) 10 ⁻¹² W*	91	92	92	93	93	94	94	94	95	95	96	96
Sound pressure level dB(A) at 10 m**	59	60	60	61	61	62	62	62	62	63	63	64

Note:

* In accordance with ISO 9614-1 and certified by Eurovent

** Average sound pressure level, unit in a free field on a reflective surface.

Hydronic module (option)

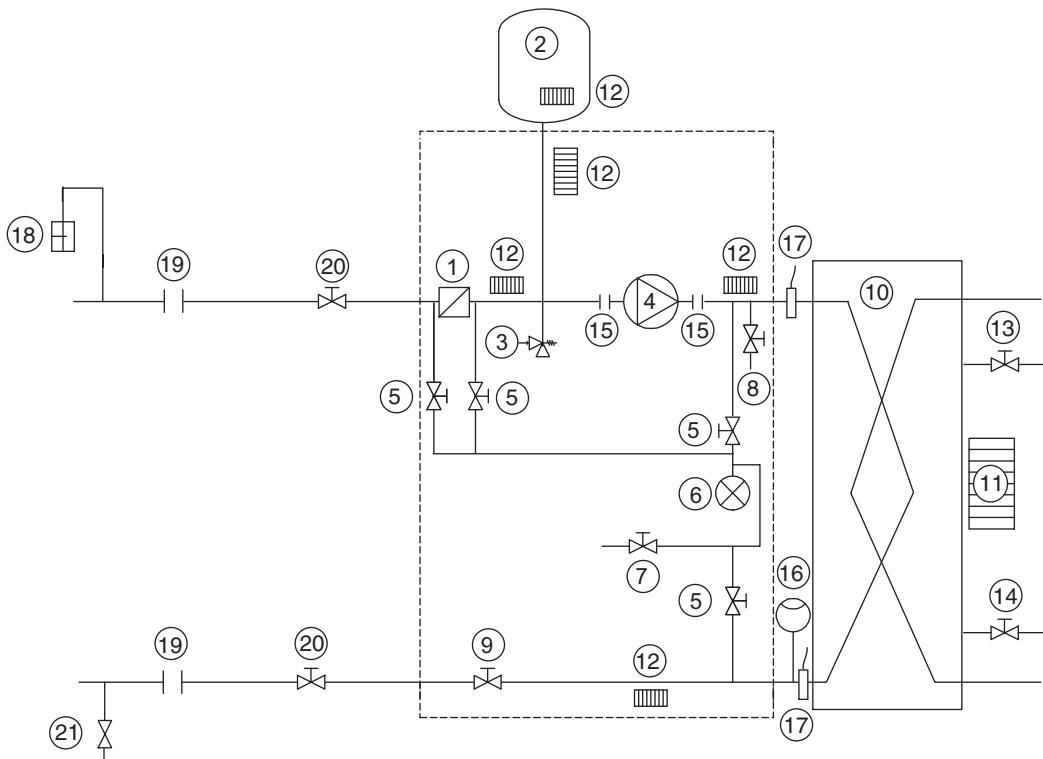

Typical hydronic circuit diagram



Hydronic module

Legend

Components of unit and hydronic module

- 1 Victaulic screen filter
- 2 Expansion tank
- 3 Safety valve
- 4 Available pressure pump
- 5 Pressure tap valve (see Installation Manual)
- 6 Pressure gauge to measure the component pressure loss (see Installation Manual)
- 7 System vent valve, pressure gauge
- 8 Drain valve
- 9 Water flow control valve
- 10 Heat exchanger
- 11 Evaporator defrost heater (option)
- 12 Hydronic module defrost heater
- 13 Air vent (evaporator)
- 14 Water purge (evaporator)
- 15 Expansion compensator (flexible connections)
- 16 Flow switch
- 17 Water temperature sensor

System components

- 18 Air vent
- 19 Flexible connection
- 20 Shut-down valves
- 21 Charge valve

----- Hydronic module (units with hydronic module)

Notes:

- The system includes frost protection (anti-freeze solution or electric heater).
- The hydronic module includes frost protection via electric heaters.
- The unit evaporator includes frost protection via a factory-installed optional electric heater (evaporator frost protection option)

Physical data

30RB		262	302	342	372	402	432	462	522	602	672	732	802
Nominal cooling capacity*	kW	256	291	325	356	388	415	444	503	593	648	700	753
Operating weight**	kg	2510	3160	3360	3440	3570	4160	4300	4510	5810	6020	6740	6950
Standard unit with Euro Pack option	kg	2755	3465	3665	3785	3915	4505	4695	4925	-	-	-	-
Standard unit with Euro Pack option and high-pressure dual-pump hydronic module option	kg	2320	2920	3120	3180	3310	3860	4000	4190	5440	5640	6320	6510
Refrigerant		R410A											
Circuit A	kg	26.0	35.5	37.0	38.0	38.5	46.0	47.5	47.5	39.0	39.0	48.0	48.0
Circuit B	kg	26.0	26.0	26.0	38.0	38.5	39.0	39.0	47.5	39.0	39.0	48.0	48.0
Circuit C	kg	-	-	-	-	-	-	-	-	39.0	48.0	39.0	48.0
Compressors		Hermetic scroll, 48,3 r/s											
Circuit A		2	3	3	3	3	4	4	4	3	3	4	4
Circuit B		2	2	2	3	3	3	3	4	3	3	4	4
Circuit C		-	-	-	-	-	-	-	-	3	4	3	4
No. of control stages		4	5	5	6	6	7	7	8	9	10	11	12
Minimum capacity	%	25	18	20	15	17	13	14	13	11	10	9	8
Control		PRO-DIALOG Plus											
Condensers		Grooved copper tubes and aluminium fins											
Fans		Axial FLYING BIRD IV with rotating shroud											
Quantity		4	5	5	6	6	7	7	8	9	10	11	12
Total air flow	l/s	18056	22569	22569	27083	27083	31597	31597	36111	40625	45139	49653	54167
Speed	r/s	16	16	16	16	16	16	16	16	16	16	16	16
Evaporator		Direct expansion, shell-and-tube											
Water volume	l	110	110	125	125	125	113	113	113	284	284	284	284
Max. water-side operating pressure without hydronic module	kPa	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
Hydronic module (option)		Centrifugal, monocell, low or high pressure (as required)											
Water pump		Single or twinned dual pump (as required)											
Quantity		1	1	1	1	1	1	1	1	-	-	-	-
Expansion tank volume	l	50	80	80	80	80	80	80	80	-	-	-	-
Max. water-side operating pressure	kPa	400	400	400	400	400	400	400	400	-	-	-	-
Water connections without hydronic module		Victaulic											
Diameter	in.	4	4	4	4	4	6	6	6	6	6	6	6
Outside tube diameter	mm	114.3	114.3	114.3	114.3	114.3	168.3	168.3	168.3	168.3	168.3	168.3	168.3
Water connections with hydronic module		Victaulic											
Diameter	in.	4	4	4	4	4	5	5	5	-	-	-	-
Outside tube diameter	mm	114.3	114.3	114.3	114.3	114.3	139.7	139.7	139.7	-	-	-	-

Legend:

* Nominal conditions: evaporator entering/leaving water temperature 12°C/7°C, outside air temperature 35°C, evaporator fouling factor 0.000018 m² K/W

** Weights are for guidance only

Electrical data

30RB (without hydronic module)	262	302	342	372	402	432	462	522	602	672	732	802
Power circuit												
Nominal power supply	V-ph-Hz	400-3-50										
Voltage range	V	360-440										
Max. connectable power cable section												
Circuits A+B	mm ²	2x240	2x240	2x240	2x240	2x240	3x240	3x240	2x240	2x240	3x240	3x240
Circuit C	mm ²	-	-	-	-	-	-	-	2x185	2x185	2x185	2x185
Control circuit supply		24 V, via internal transformer										
Maximum unit power input*												
Circuits A+B	kW	132	143	151	176	198	209	231	264	198	198	264
Circuit C	kW	-	-	-	-	-	-	-	99	132	99	132
Nominal unit current draw**												
Circuits A+B	A	167	185	193	226	250	268	292	334	250	250	334
Circuit C	A	-	-	-	-	-	-	-	125	167	125	167
Maximum unit current draw***												
Circuits A+B	A	222	244	255	299	332	355	388	443	332	332	443
Circuit C	A	-	-	-	-	-	-	-	166	222	166	222
Maximum start-up current												
Standard unit†												
Circuits A+B	A	426	448	459	502	535	557	590	645	535	535	645
Circuit C	A	-	-	-	-	-	-	-	371	426	371	426
Cosine phi, unit at nom. capacity		0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84
Stability for three-phase short circuits												
(TN system)												
Unit with main disconnect												
without fuse (option)												
Short-time current (1 s)-rms/peak value												
Circuits A+B	kA/kA	13/26	13/26	13/26	13/26	13/26	15/30	15/30	15/30	13/26	13/26	15/30
Circuit C	kA/kA	-	-	-	-	-	-	-	-	13/26	13/26	13/26
Unit with main disconnect												
with fuse (option)												
Current value, rms												
Circuits A+B	kA	50	50	50	50	50	50	50	50	50	50	50
Circuit C	kA	-	-	-	-	-	-	-	50	50	50	50

* Power input of the compressor(s) + fan(s) at maximum unit operating conditions. Values given on the unit name plate.

** Nominal unit current draw at nominal conditions: evaporator entering/leaving water temperature 12°C/7°C, outdoor air temperature 35°C. The current values are given at 400 V nominal voltage.

*** Maximum unit operating current at maximum unit power input and 400 V.

† Maximum instantaneous starting current at 400 V nominal voltage and with compressor in across-the-line start (maximum operating current of the smallest compressor(s) + fan current + locked rotor current of the largest compressor).

‡ Effective/peak current value (TN system)

Note: Units 30RB 602-802 have two electrical connection points.

Hydronic module (option)	262	302	342	372	402	432	462	522	602	672	732	802
Single and dual low-pressure pump												
Shaft power	kW	2	3	3	4	4	4	6	6	-	-	-
Power input*	kW	2.7	3.6	3.6	4.6	4.6	4.6	6.3	6.3	-	-	-
Maximum current draw at 400 V**	A	4.7	6.4	6.4	8.2	8.2	8.2	11.2	11.2	-	-	-
Single and dual high-pressure pump												
Shaft power	kW	4	6	6	8	8	8	11	11	-	-	-
Power input*	kW	4.7	6.4	6.4	8.5	8.5	8.5	12.2	12.2	-	-	-
Maximum current draw at 400 V**	A	8.2	11.2	11.2	15.2	15.2	15.2	21.2	21.2	-	-	-

Note: The water pump power input values are given for guidance only.

* To obtain the maximum power input for a unit with hydronic module add the maximum unit power input from the top table to the pump power input (*) from the table above.

** To obtain the maximum unit operating current draw for a unit with hydronic module add the maximum unit current draw from the top table to the pump current draw (**) from the table above.

Electrical data notes for 30RB units:

- 30RB 262-522 units have a single power connection point at the main disconnect switch; 30RB 602-802 units have two connection points at the main disconnect switch.
- The control box includes the following standard features:
 - Starter and motor protection devices for each compressor and the fan(s)
 - Control devices

• Field connections:

- All connections to the system and the electrical installations must be in full accordance with all applicable local codes.
- The Carrier 30RB units are designed and built to ensure conformance with these codes. The recommendations of European standard EN 60 204-1 (corresponds to IEC 60204-1) (machine safety - electrical machine components - part 1: general regulations) are specifically taken into account, when designing the electrical equipment.

• Electrical reserves:

- Circuit A has disconnect switches and branch sections, designed to supply the evaporator pump power input.

IMPORTANT:

- Generally the recommendations of IEC 60364 are accepted as compliance with the requirements of the installation directives. Conformance with EN 60204 is the best means of ensuring compliance with the Machines Directive § 1.5.1.
- Annex B of EN 60204-1 describes the electrical characteristics used for the operation of the machines.

1. The operating environment for the 30RB units is specified below:

- a. Environment* - Environment as classified in EN 60721 (corresponds to IEC 60721) :
 - outdoor installation*
 - ambient temperature range: -20°C to +48°C, class 4K3*
 - altitude: ≤ 2000 m
 - presence of hard solids, class 4S2 (no significant dust present)
 - presence of corrosive and polluting substances, class 4C2 (negligible)
 - vibration and shock, class 4M2
- b. Competence of personnel, class BA4* (trained personnel - IEC 60364)

2. Power supply frequency variation: ± 2 Hz.

3. The neutral (N) line must not be connected directly to the unit (if necessary use a transformer).

4. Overcurrent protection of the power supply conductors is not provided with the unit.

5. The factory-installed disconnect switch(es)/circuit breaker(s) is (are) of a type suitable for power interruption in accordance with EN 60947-3 (corresponds to IEC 60947-3).

6. The units are designed for simplified connection on TN(s) networks (IEC 60364). For IT networks derived currents may interfere with network monitoring elements, and it is recommended to create an IT type divider for the system units that require this and/or a TN type divider for Carrier units. Please consult the appropriate local organisations to define the monitoring and protection elements and carry out the electrical installation.

If short circuit currents above those given in the electrical data table are likely, modifications are required. Please contact your local Carrier representative.

NOTE

If particular aspects of an actual installation do not conform to the conditions described above, or if there are other conditions which should be considered, always contact your local Carrier representative.

* The required protection level for this class is IP43B (according to reference document IEC 60529). All 30RB units are protected to IP44CW and fulfil this protection condition.

Operating limits

Evaporator water flow rate

	Min. water flow l/s	Max. water flow* l/s
30RB		
262	3.5	26.7
302	3.9	26.7
342	4.4	29.4
372	4.9	29.4
402	5.2	29.4
432	5.8	31.1
462	6.1	31.1
522	6.9	31.1
602	7.9	50.6
672	8.7	50.6
732	9.6	50.6
802	10.3	50.6

Legend

* Maximum flow rate for an evaporator pressure drop of 100 kPa (unit with hydronic module)

Outdoor air temperature °C

30RB	During operation (standard)		During operation (winter operation option)	
	Minimum	Maximum	Minimum	Maximum
262-802	0	48	-20	48


Note

The evaporator must be protected against frost (water-glycol solution or frost protection option), if the air temperature at shut-down or during operation is below 3°C

Entering water temperature °C

30RB	At shut-down (standard)	At start-up	During operation	
	Maximum, °C	Maximum, °C	Minimum, °C	Maximum °C
262-802	48	40	3.3	15

Operating range

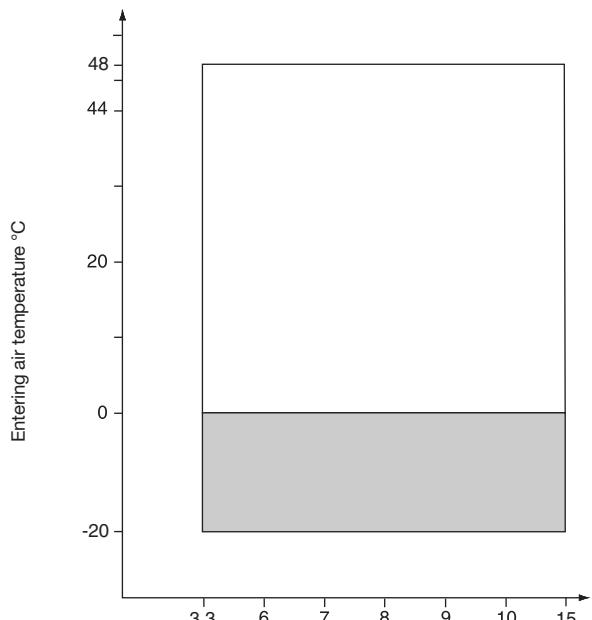

Evaporator leaving water temperature °C

Notes

1 Evaporator At = 5 K


2 With the evaporator frost protection option the evaporator is protected against frost down to -20°C.

Legend

Operating range with winter operation option and evaporator frost protection option, if the circuit does not contain any anti-freeze solution.

Available static system pressure

Low-pressure pump (hydronic module option)

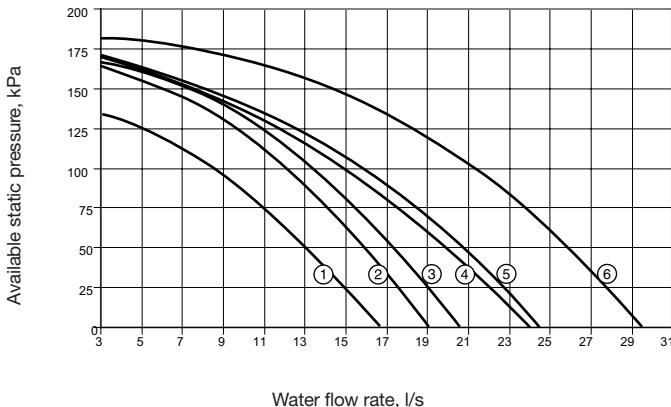


Water flow rate, l/s

Legend

- 1 30RB 262
- 2 30RB 302
- 3 30RB 342
- 4 30RB 372-402
- 5 30RB 432
- 6 30RB 462-522

High-pressure pump (hydronic module option)

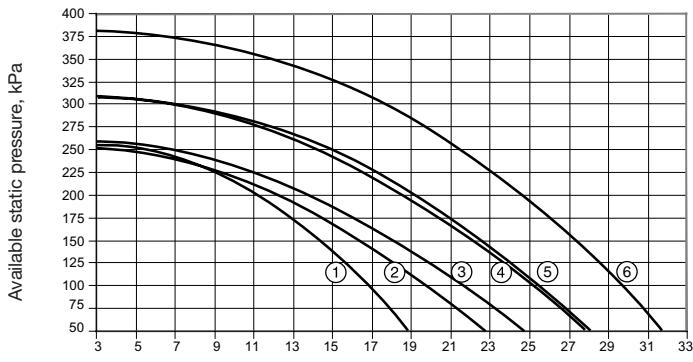


Water flow rate, l/s

Legend


- 1 30RB 262
- 2 30RB 302
- 3 30RB 342
- 4 30RB 372-402
- 5 30RB 432
- 6 30RB 462-522

Dimensions/clearances


30RB 262

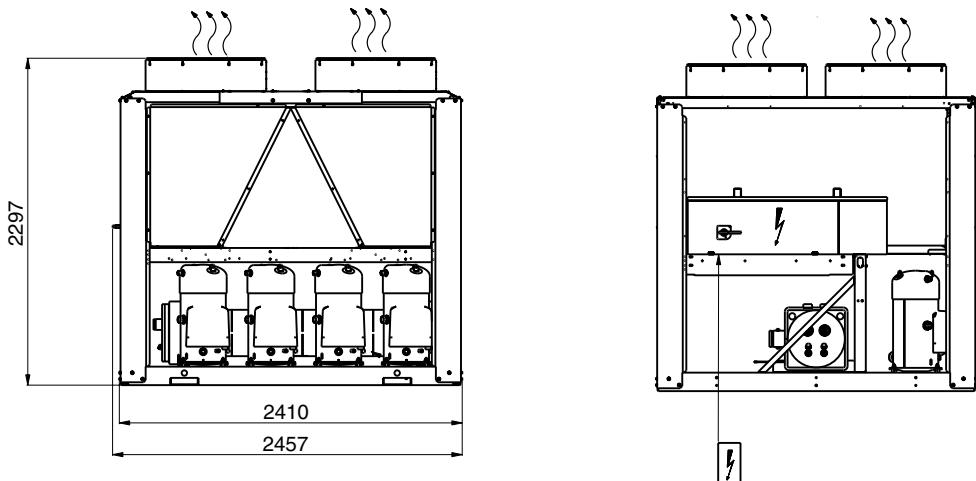

Unit with hydronic module

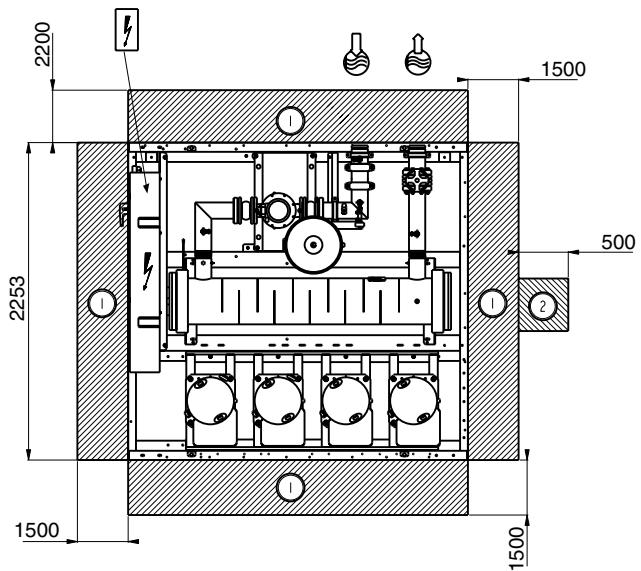

Unit without hydronic module

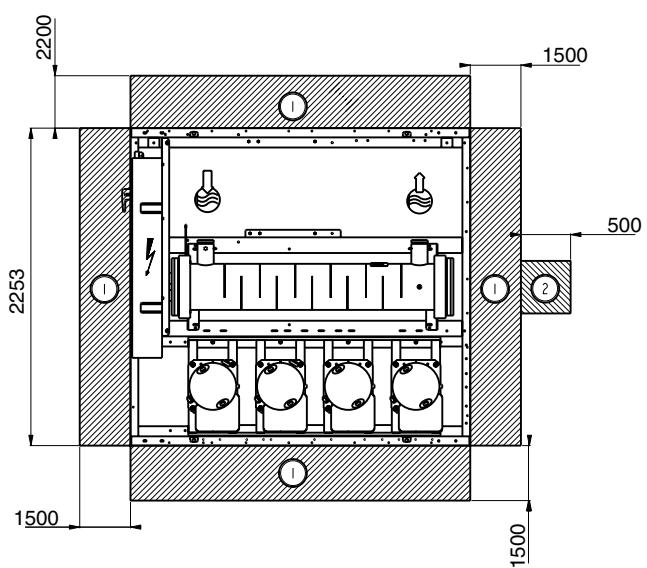


Legend:
All dimensions are given in mm.

(1) Required clearances for maintenance and air flow

(2) Recommended space for evaporator tube removal



Water inlet



Water outlet



Power supply inlet




Air outlet, do not obstruct

NOTE:


Drawings are not contractually binding. Before designing an installation, consult the certified dimensional drawings, available on request.

Dimensions/clearances


30RB 302-522

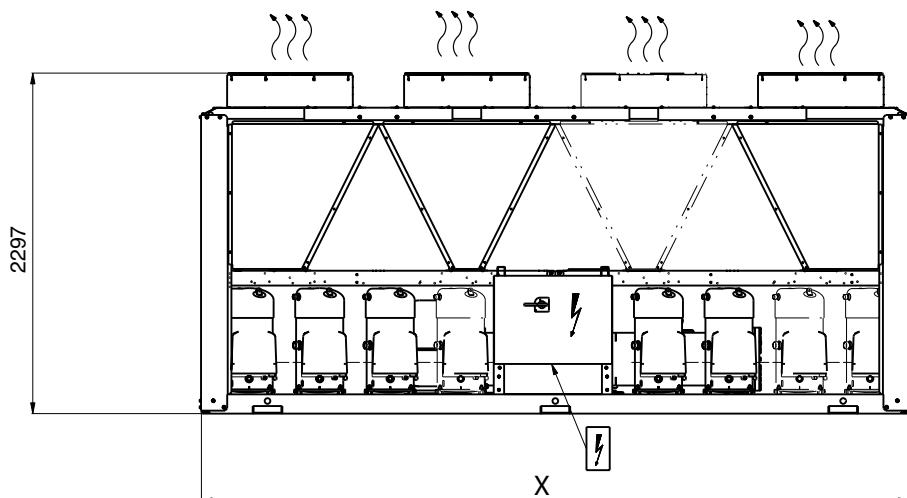

Unit with hydronic module

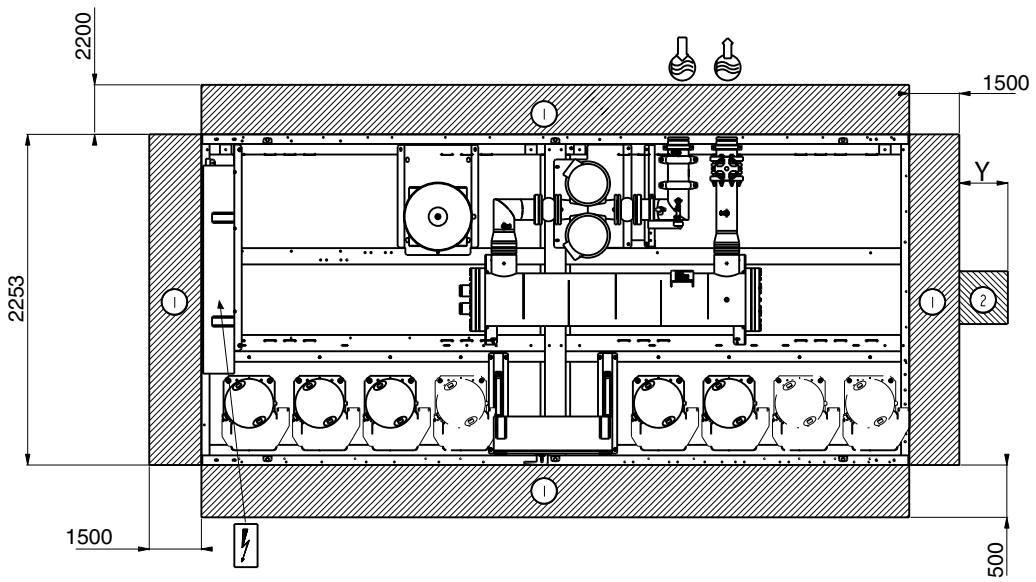


Unit without hydronic module

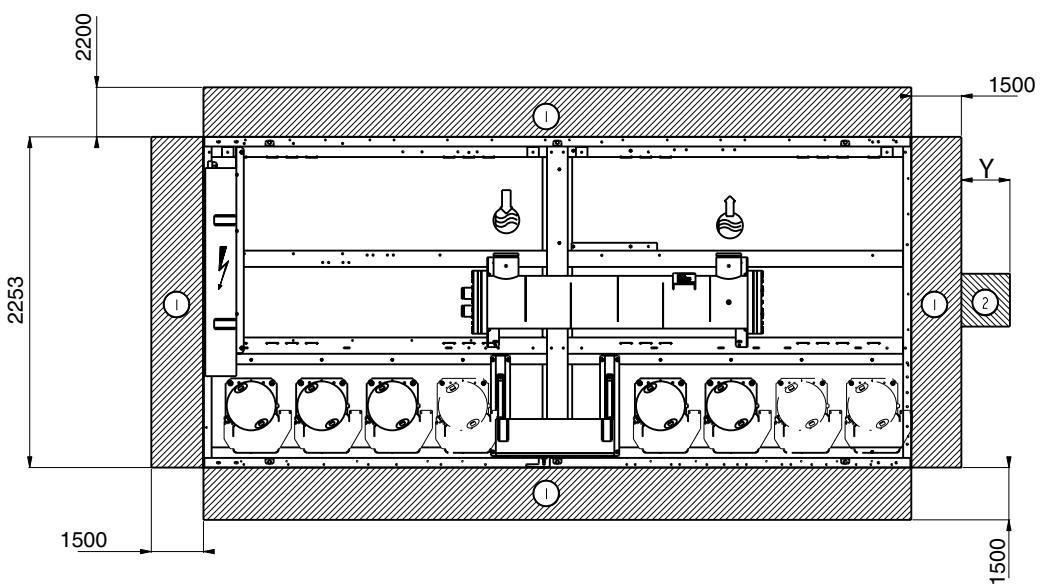

Dimensions/clearances

30RB 602-802

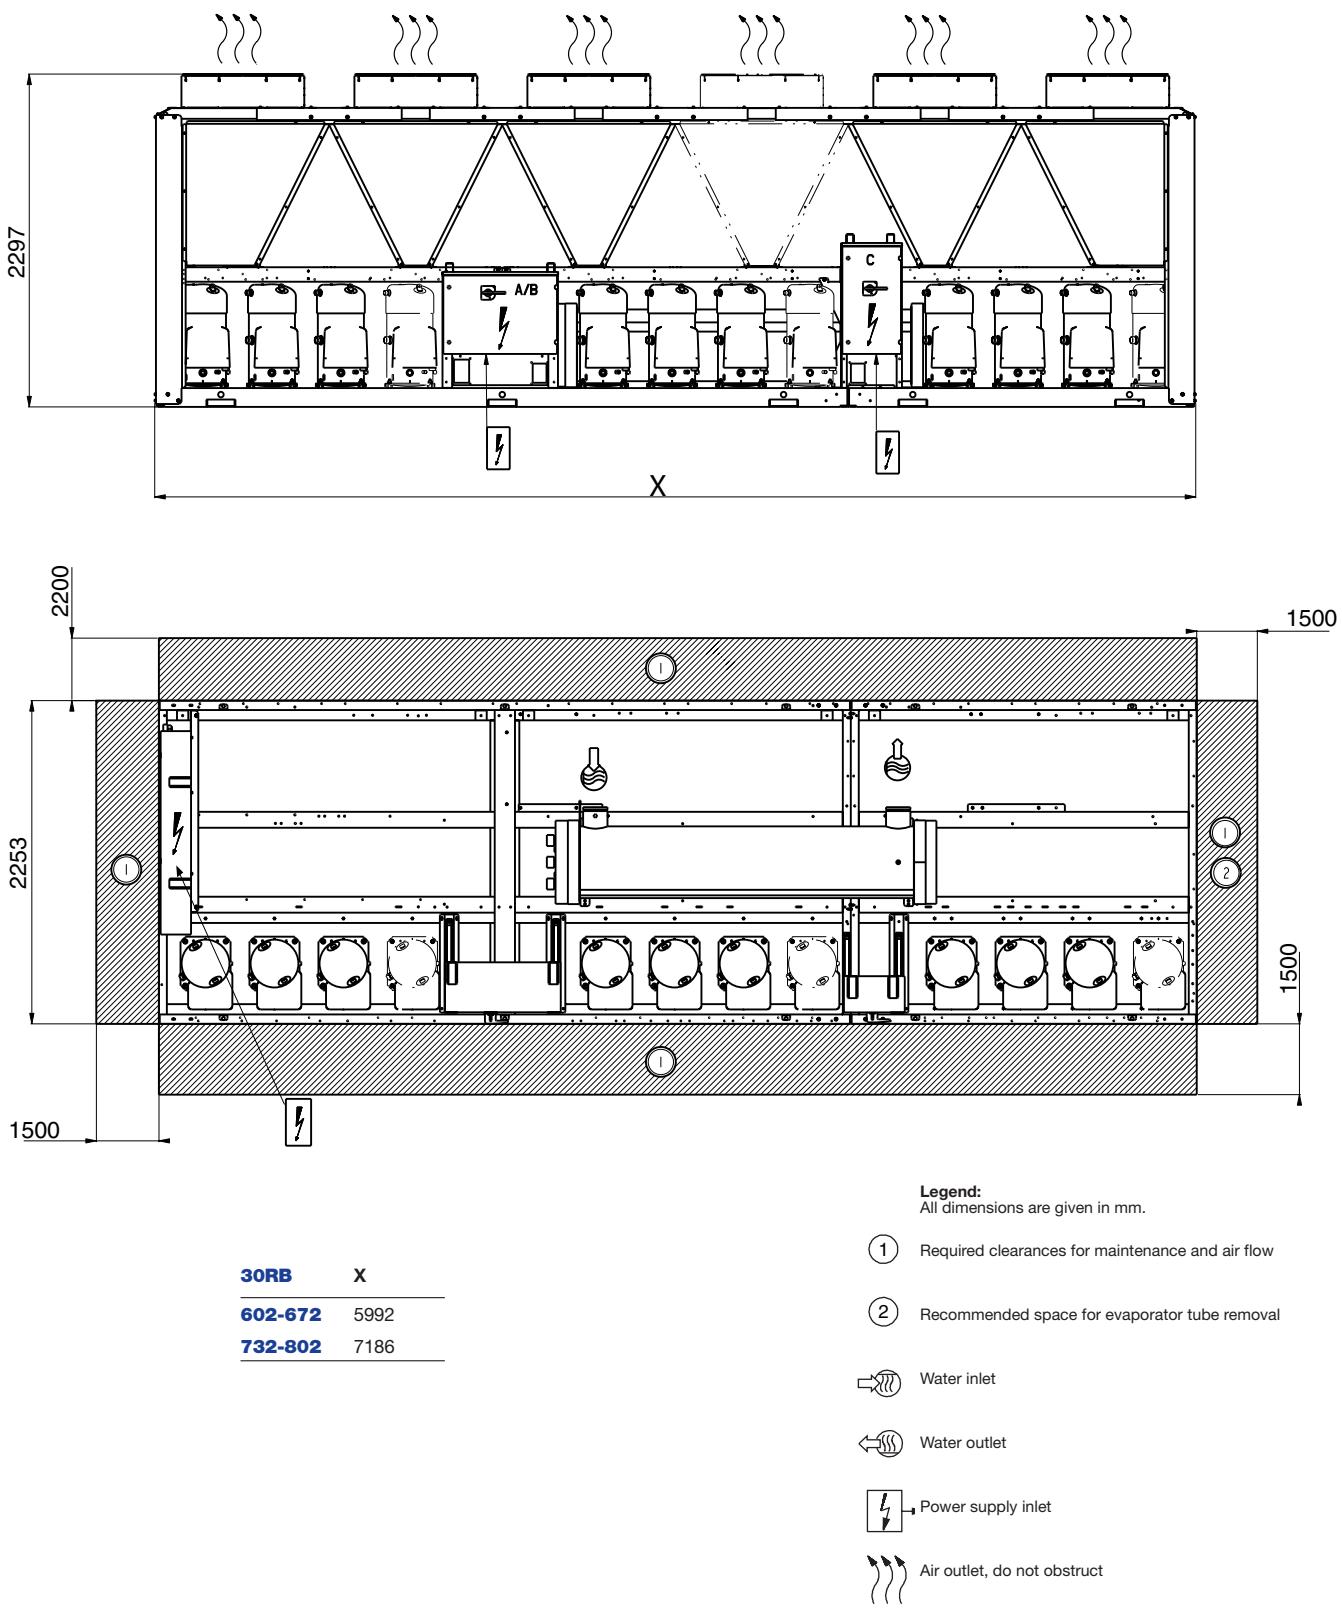

NOTE:
Drawings are not contractually binding. Before designing an installation, consult the certified dimensional drawings, available on request.

Cooling capacities

LWT	Condenser entering air temperature, °C										45										
	25					30					35					40					
C°	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	
262	5	270	74	80	13	36	54	176	256	81	88	12	33	62	186	241	89	95	11	28	79
302	5	306	77	86	15	43	70	174	291	85	94	14	40	79	183	274	94	102	13	25	106
342	3	343	91	99	16	37	66	173	325	100	108	15	34	77	183	306	110	118	15	33	99
372	3	373	95	105	18	42	74	211	354	105	114	17	39	82	222	333	115	125	16	35	92
402	4	409	111	121	19	49	56	189	388	122	132	18	45	66	202	365	134	143	17	41	77
432	4	433	112	123	21	47	50	180	413	124	135	20	43	61	194	391	136	147	19	39	72
462	5	464	127	138	22	53	91	241	442	140	151	21	49	101	257	416	153	164	20	44	112
522	5	528	144	158	25	68	59	191	503	159	172	24	62	73	212	474	174	187	23	55	87
602	6	626	165	180	30	38	-	-	594	181	196	28	34	-	-	560	199	213	27	31	-
672	6	683	182	198	32	44	-	-	649	200	216	31	40	-	-	611	219	235	29	36	-
732	7	738	200	218	35	51	-	-	701	220	238	33	47	-	-	660	258	31	42	-	-
802	7	794	218	237	38	59	-	-	754	239	258	36	53	-	-	709	262	281	34	48	-
262	6	279	75	81	13	37	49	170	265	82	89	13	35	57	180	249	90	96	12	32	66
302	6	315	79	87	15	44	64	169	300	87	95	14	41	73	178	282	95	103	13	38	84
342	6	353	93	101	17	39	59	167	336	102	110	16	35	70	177	315	111	119	15	32	95
372	6	386	96	106	18	45	67	204	366	106	116	17	41	77	215	344	117	126	16	37	106
402	7	422	112	122	20	52	49	181	400	123	133	19	48	60	195	376	135	145	18	43	72
432	7	446	114	125	21	50	42	171	426	125	136	20	45	54	185	403	138	149	19	41	66
462	7	481	129	140	23	57	84	229	457	142	153	22	52	95	246	431	155	166	21	46	106
522	7	545	147	160	26	72	49	176	519	161	174	25	66	64	199	489	177	189	23	59	79
602	7	645	167	182	31	40	-	-	612	184	198	29	36	-	-	576	201	216	27	32	-
672	7	703	184	200	33	47	-	-	668	202	218	32	43	-	-	629	222	238	30	38	-
732	7	761	203	221	36	54	-	-	723	223	241	34	49	-	-	680	244	262	32	44	-
802	7	819	221	241	39	62	-	-	777	243	262	37	56	-	-	731	265	284	35	50	-
262	7	287	76	82	14	39	43	163	273	83	90	13	36	52	174	256	91	98	12	33	62
302	7	325	80	88	15	46	57	163	309	88	96	15	43	68	172	291	96	104	14	30	71
342	7	365	94	102	17	41	51	160	346	103	111	16	37	64	171	325	113	121	15	34	76
372	7	399	97	107	19	47	61	195	375	107	117	18	43	71	208	356	118	128	17	39	81
402	7	435	114	123	21	55	42	172	413	125	135	20	50	54	176	388	137	147	19	45	66
462	7	460	115	126	22	53	34	161	439	127	138	21	48	47	176	415	139	151	20	43	60
522	7	495	142	24	60	76	217	471	144	155	22	55	88	236	444	157	169	21	49	100	
602	7	666	148	162	27	76	40	162	533	163	176	25	69	56	186	503	179	191	24	62	72
672	7	724	187	203	34	49	-	-	632	187	201	30	39	-	-	593	204	218	28	34	-
732	7	786	207	224	37	58	-	-	745	227	244	35	52	-	-	700	248	265	33	47	-
802	7	845	224	244	40	66	-	-	801	246	266	38	60	-	-	753	269	288	36	53	-

Legend:

- LWT Leaving water temperature
- CAP kW Cooling capacity
- COMP kW Compressor power input (compressors, fans and control circuit)
- UNIT kW Unit power input (compressors, fans and control circuit)
- COOL I/s Evaporation water flow rate
- PRES kPa⁽ⁱ⁾ Available pressure at the unit outlet with hydronic module with low-pressure pump (option)
- PRES kPa^a Available pressure at the unit outlet with hydronic module with high-pressure pump (option)

Net cooling capacity: 1,000
 Energy efficiency ratio: 1,000
 Evaporator pressure drop: 1,000

Full load correction factors for Eurovent laboratory test:

- Standard units: refrigerant: R410A
- Evaporator temperature rise: 5 K
- Evaporator fluid: chilled water
- Fouling factor: 0.18 x 10³ m² K/W

Performances in accordance with EN 12055

Cooling capacities (cont.)

30RB 262-802

Condenser entering air temperature, °C

LWT C°	25										30										35										40									
	CAP kW	COMP kW	UNIT kW	COOL kW	COOL kW	PRES kPa ⁽ⁱ⁾	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	PRES kPa ⁽ⁱ⁾	CAP kW	COMP kW	UNIT kW	COOL kW	PRES kPa ⁽ⁱ⁾	PRES kPa ⁽ⁱ⁾			
262	8	295	77	83	14	41	38	156	280	84	91	13	38	47	168	264	92	99	13	35	57	180	246	101	107	12	31	67	193	227	111	117	11	28	77	204				
302	81	336	81	89	16	49	49	156	320	89	97	15	45	60	166	301	98	106	14	42	72	177	280	107	115	13	38	85	188	258	118	126	12	34	97	199				
342	96	376	96	104	18	43	43	153	357	105	113	17	39	56	164	335	114	122	16	35	70	177	312	125	133	15	31	84	189	289	137	145	14	28	97	201				
372	108	412	99	108	20	50	54	187	391	109	118	19	46	65	200	367	119	129	18	41	76	214	341	131	140	16	37	88	228	314	144	153	15	32	99	242				
402	125	448	115	125	21	58	34	162	425	127	136	20	53	47	178	400	139	148	19	48	60	194	373	152	161	18	42	73	211	345	167	176	16	37	86	226				
432	144	474	116	128	23	56	26	150	452	128	140	22	51	39	167	427	141	152	20	46	53	184	400	155	166	19	41	67	202	370	170	181	18	35	82	219				
462	144	511	133	144	24	64	68	204	486	146	157	23	58	81	225	457	160	171	22	52	94	174	426	146	186	20	46	108	267	395	191	202	19	40	120	286				
502	164	522	151	164	28	80	30	146	548	165	178	26	73	47	173	516	181	194	25	65	65	200	483	198	211	23	38	82	227	448	217	229	21	50	98	252				
542	187	602	173	187	33	45	-	651	189	204	31	41	-	-	611	207	221	29	36	-	-	569	226	240	27	32	-	-	527	247	261	25	28	-	-	-	-			
602	205	672	189	189	35	52	-	-	708	208	224	34	47	-	-	667	227	243	32	43	-	-	623	249	265	30	37	-	-	577	273	288	27	33	-	-	-	-		
732	228	732	811	210	228	39	61	-	-	769	230	248	37	49	-	-	721	251	269	34	49	-	-	672	274	292	32	43	-	-	623	300	317	30	38	-	-	-	-	
802	247	873	228	247	42	70	-	-	827	250	269	39	63	-	-	776	273	292	37	56	-	-	723	298	317	34	49	-	-	670	326	345	32	43	-	-	-	-		

Legend:

LWT Leaving water temperature

CAP kW Cooling capacity

COMP kW Unit power input (compressors, fans and control circuit)

UNIT kW Evaporator water flow rate

COOL I/s Evaporator pressure drop

PRES kPa⁽ⁱ⁾ Available pressure at the unit outlet with hydronic module with low-pressure pump (option)

PRES kPa^(o) Available pressure at the unit outlet with hydronic module with high-pressure pump (option)

Full load correction factors for Eurovent laboratory test:

Net cooling capacity 1.000
Energy efficiency ratio 1.000
Evaporator pressure drop 1.000

Application data:

Standard units: refrigerant: R410A

Evaporator temperature rise: 5 K

Evaporator fluid: chilled water

Fouling factor: 0.18 x 10⁻⁴ (m²)K/W

Performances in accordance with EN 12055



001

Environmental Management System Approval



Order No. 13438-20, 09.2004. Supersedes order No.: New.
Manufacturer reserves the right to change any product specifications without notice.
The cover photo is solely for illustration purposes and not contractually binding.

Manufactured by: Carrier SA, Montluel, France
Printed on Totally Chlorine Free Paper.
Printed in the Netherlands.